

## TR10 Industrial RTD Assembly

TR10 series resistance temperature detectors (RTDs) are industrial assemblies supplied with or without a temperature transmitter. An extensive range of elements, connection heads, insertion lengths, neck lengths, and process connections can be individually selected for the appropriate application. Replacement sensors can also be configured for this model.

RTDs in this series can be inserted directly into a process or combined with a variety of thermowell designs.



### Applications:

TR10 series assemblies are suitable for most industrial and commercial applications including:

- Air-conditioning and refrigeration systems
- Chemical and petrochemical industries
- Electronics and semiconductor industries
- Energy and power plant technology
- Machinery, plant and tank measurement
- Oil and gas industries
- Offshore exploration and drilling
- Pipeline control and custody transfer
- Power and utilities
- Pulp and paper
- Water and wastewater treatment

### Connection Heads

Imperial Grid 1" x 1"

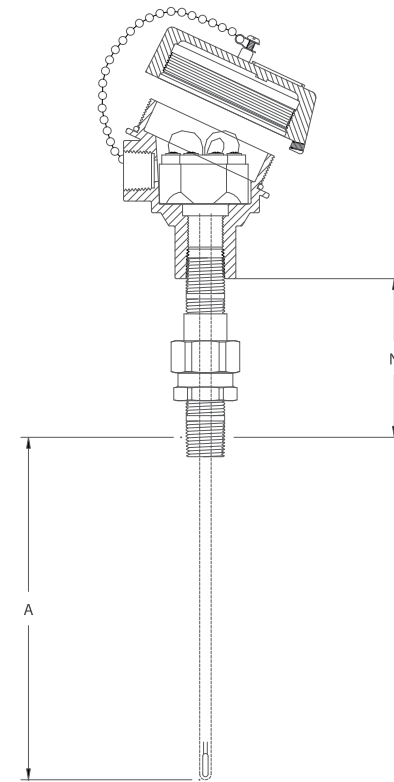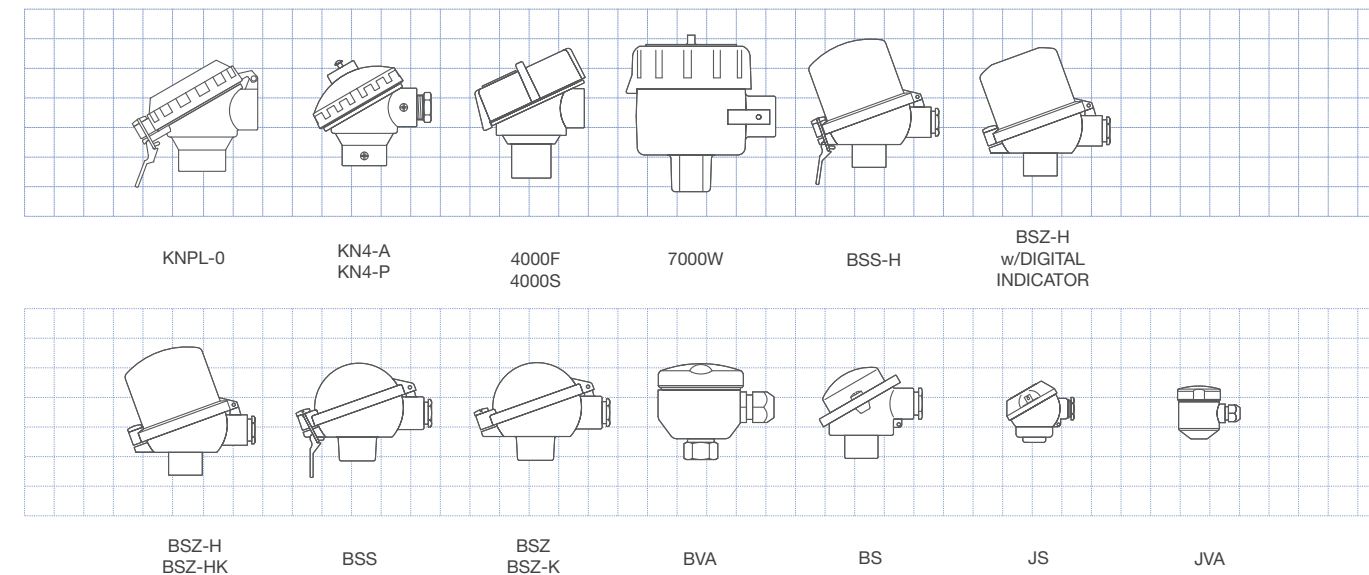

# TR10

Create your product part number by selecting the appropriate assembly items from each of the categories below. Enter the item code into the applicable box to generate the part number.

1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---

Part Number	TR10-X-X-XXXXXX-X-XXXX-XXX-XXX-XX-X-XXXX-XX
<b>1 Assembly description</b>	
Code	
0	Industrial assembly configured
1	Industrial sensor configured
A	Measuring insert [TR002]
B	RTD assembly with neck tube [TR200]
C	DIN RTD assembly with threaded protection tube [TR201]
D	RTD assembly with protection tube [TR211 / TR212]
F	DIN RTD assembly with flanged protection tube [TR401]
H	RTD assembly without thermowell [TR750 / TR760]
J	RTD assembly with perforated protection tube [TR820]
K	Measuring insert EEx-d [TRD02] (Replacement insert, for use in TRD20 only)
L	RTD assembly EEx-d [TRD20]

<b>2 Unit of measure</b>	
I	Imperial
M	Metric

<b>3 Insert design</b>	
S	Self gripping spring
N	Fixed to the fitting
D	Spring loaded plate (removable insert)
M	Fixed miniature terminal plate (not removable)
T	Spring loaded miniature terminal plate (removable)

<b>4 Electrical approval</b>	
C	CSA Ex-proof
F	FM Ex-proof
A	EEx-i (ATEX) gas, acc. to directive 94/9/EC
B	EEx-i (ATEX) gas/dust, acc. to directive 94/9/EC
J	EEx-d (ATEX) acc. to directive 94/9/EC
H	EEx-n (ATEX) acc. to directive 94/9/EC
D	EEx-l, confirmation NAMUR NE24
Z	Without

<b>5 Flame path fitting</b>	
1	Yes
Z	Without

<b>6 Connection head</b>	
1	4000 F (Aluminum)
2	4000 S (Stainless steel)
3	7000 W (Aluminum)
7	KN4-A (Aluminum)
8	KN4-P (Polypropylene)
9	KNPL-0 (Aluminum)
A	BS (Aluminum)
B	BSZ (Aluminum)
D	BSZ-H (Aluminum)
J	BSZ-K (anti static Polyamide)
K	BSZ-HK (anti static Polyamide)
N	BSZ-H with digital temperature indicator DIH10 (set to transmitter range)
E	BSS (Aluminum)
F	BSS-H (Aluminum)
I	BVA (Stainless steel)
R	JS (Aluminum)
S	JVA (Stainless steel)
Z	Without

<b>7 Cable entry</b>	
S	1/2 NPT
F	3/4 NPT
T	M20 x 1.5
P	M16 x 1.5
L	M12 x 1.5
Z	Without

<b>8 Head instrument connection</b>	
S	1/2 NPT
F	3/4 NPT
B	G 1/2 B (BSP 1/2 inch)
T	M20 x 1.5
A	M24 x 1.5
J	M10 x 1.0
Z	Without

<b>9 Terminal block / Transmitter</b>	
1	Crastin terminal block
2	Ceramic terminal block
3	T12 (Programmable Digital Transmitter)
8	T19 (Analogue Transmitter)
4	T24 (Programmable Analogue Transmitter)
6	T32 (HART® Transmitter)
9	T53 (Fieldbus Foundation / PROFIBUS PA Transmitter)
B	T91.10 (Analogue Transmitter, DIN form B)
C	T91.20 (Analogue Transmitter, form J)
X	Without / prepared for transmitter
Y	Without / flying leads

<b>10 Neck extension</b>	
F	Nipple-Union-Nipple
E	Nipple
D	Fixed double threaded hex bushing
R	Spring loaded Bushing-Union-Nipple
G	Fixed single threaded hex bushing
K	Spring loaded bushing without oil seal
H	Spring loaded bushing with oil seal
5	Bushing with oil seal
U	Nipple-Union (Protection tube only)
L	Adjustable lock nut
C	Fixed single threaded hex bushing with additional fitting
X	Neck tube unthreaded, diam. 12 x 1.5 mm
V	Neck tube unthreaded, diam. 12 x 2.5 mm
S	Neck tube male threaded, diam. 12 x 1.5 mm (DIN 43772)
T	Neck tube male threaded, diam. 12 x 2.5 mm (DIN 43772)
Q	Neck tube male threaded, diam. 14 x 2.5 mm (DIN 43772)
Z	Without

<b>11 Neck material</b>	
G	Galvanized steel
S	Stainless steel 316 (1.4401)
F	Stainless steel 316 Ti (1.4571)
Z	Without

Note: Some configurations are unavailable. Your WIKA sales person will notify you if you have made an incorrect selection

10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----

<b>12 Fitting style</b>	
A	Fixed fitting, threaded hex bushing
B	Compression fitting with stainless steel ferrule
C	Compression fitting with Teflon® ferrule
D	Compression fitting, spring loaded, with stainless steel ferrule
Z	Without

<b>13 Fitting material</b>	
A	Stainless steel 316 (1.4401)
B	Stainless steel 316 Ti (1.4571)
Z	Without

<b>14 Thread size</b>	
K	1/2 NPT
J	3/4 NPT
N	1/4 NPT
M	M20 x 1.5
F	G 1/2 B
C	G 3/4 B
R	G 1/4 B
D	G 1/8 B
V	G 3/8 B
B	G 1 B
A	M8 x 1.0
T	M10 x 1.0
S	M12 x 1.5
P	M14 x 1.5
O	M18 x 1.5
Z	Without

<b>15 N-Dimension (N) Imperial</b>	
005	0.5 inch
010	1.0 inch
015	1.5 inch
020	2.0 inch
025	2.5 inch
030	3.0 inch
035	3.5 inch
040	4.0 inch
045	4.5 inch
050	5.0 inch
055	5.5 inch
060	6.0 inch
065	6.5 inch
080	8.0 inch

<b>15 N-Dimension (N) Metric</b>	
012	12 mm
025	25 mm
030	30 mm
037	37 mm
050	50 mm
062	62 mm
065	65 mm
075	75 mm
087	87 mm
100	100 mm
112	112 mm
125	125 mm
130	130 mm
138	138 mm
140	140 mm
150	150 mm
163	163 mm
200	200 mm
210	210 mm
***	N-Dimension in mm (e.g. 84 mm = 084)
ZZZ	Without

<b>16 Element</b>	
D	Pt100, class B
C	Pt100, class A
F	Pt100, 1/10 DIN of class B at 0°C
E	Pt10, class A
A	Cu10, class B
B	Ni120, class B
K	Pt1000, class B
J	Pt1000, class A
L	Pt100, accuracy less than class B
I	Pt100, 1/3 DIN of class B at 0°C

<b>17 Wiring configuration</b>	
A	Single 2-wire
B	Single 3-wire
C	Single 4-wire
D	Single 4B-wire
E	Dual 2-wire
F	Dual 3-wire
G	Dual 4-wire
H	Dual 4B-wire

<b>18 Temperature range</b>	
K	-50...+250 °C
S	-50...+450 °C
M	-200...+250 °C
T	-200...+450 °C
H	-200...+600 °C
L	0...+850 °C
5	0...+1000 °C

<b>19 Tip construction</b>	
C	General purpose
F	Fast response (copper tip)
G	Tip sensitive (thin-film)
T	Fast response tip sensitive (copper tip)
V	Vibration proof tip (max. 10 g force)

<b>20 Sensor diameter</b>	
1	1/4 inch / 0.250 inch (6.35 mm)
4	3/16 inch / 0.188 inch (4.75 mm)
2	1/8 inch / 0.125 inch (3.17 mm)
J	1/4 inch / 0.250 inch (6.35 mm) reduced to 1/8 inch / 0.125 inch (3.17 mm)
3	0.215 inch (5.46 mm)
A	2.0 mm
B	3.0 mm
G	4.0 mm
D	6.0 mm
H	6.0 mm reduced to 3.0 mm
F	6.0 mm with 8.0 mm tip
E	8.0 mm

<b>21 Sheath material</b>	
P	Stainless steel 316 / 316 L (1.4401 / 1.4435)
J	Inconel® 600 (2.4816)
Q	Stainless steel 316 Ti (1.4571)

<b>22 A-Dimension (A)</b>	
****	Please specify (e.g. 84 mm = 00084) (e.g. 9.5 inch = 00950)

<b>23 Certificates</b>	
1	Quality certificates
Z	Without

<b>24 Additional order details</b>	
T	Additional text
Z	Without



## TR10 - Industrial RTD Assembly

Sensor Element:	Pt100, Pt1000, Pt10, Cu10, or Ni120
Measuring range:	-200 °C to +1000 °C (depending upon element)
Wiring configuration:	2, 3, and 4 wire (single or dual)
Classification tolerance:	<ul style="list-style-type: none"> <li>■ Class B to DIN EN 60751</li> <li>■ Class A to DIN EN 60751</li> <li>■ 1/3 of DIN Class B</li> <li>■ 1/10 of DIN Class B</li> <li>■ Less than class B</li> </ul>
Electrical approvals:	CSA, FM, ATEX/IEC, NAMUR
Options:	<ul style="list-style-type: none"> <li>■ Lengths and diameters standard or customer specific</li> <li>■ Transmitter mounted directly within connection head or on measuring insert DIN plate</li> <li>■ Calibration - single point, multiple points, and to Callendar-Van Dusen coefficients</li> <li>■ Material traceability of the conductors, metal sheath and mineral insulation</li> <li>■ Selectable accuracy tolerance</li> <li>■ Exchangeable measuring insert</li> <li>■ Special designs and materials</li> <li>■ Explosion protection: CSA, FM, ATEX (EEx-d)</li> <li>■ Intrinsically safe version: ATEX (EEx-i)</li> <li>■ Non-sparking version: ATEX (EEx-n)</li> <li>■ RTD transmitter matching</li> </ul>

## Features:

- The sensor can be mounted into a thermowell or directly into a process with the use of a fixed, spring loaded or compression process fitting.
- The assembly can be supplied with or without a transmitter. Transmitters convert the resistance signal from the RTD to a linear analogue or digital output (commonly 4-20 mA). This signal reduces potential inaccuracies by negating the need for compensating output lead wires.
- The assembly has electrical approvals for explosion proof hazardous locations, intrinsic safety, ingress protection and general purpose areas.
- Electrical authorities that have registered these approvals include CSA, FM, ATEX/IEC and NAMUR. The approvals can be with or without an attached thermowell. A specially designed and patented integral flame path fitting makes it possible when supplied without a thermowell.
- The RTD sensors available for this assembly consist of a variety of sheath materials including stainless steels, corrosion resistant and high temperature oxidation resistant alloys. For temperatures greater than 600°C it is advisable to utilize an Inconel 600 sheath in place of stainless steel.
- RTD diameters range from 0.125 inch to 0.250 inch and 2 mm to 8 mm. Standard diameters are 0.125 inch & 0.250 inch and 3 mm & 6 mm.
- The RTD sensor can be spring-loaded ensuring a positive contact to the base of a thermowell bore.
- RTD temperature ranges are dependent on the RTD element, sheath material, element accuracy and the tip construction:
  - General purpose, the temperature range is -200°C to 1000°C
  - Fast response copper tip, the temperature range is -200°C to 250°C
  - Tip sensitive thin film, the temperature range is -50°C to 1000°C
  - Fast response/tip sensitive copper tip including the vibration proof construction, the temperature range is -50°C to 250°C
- A variety of neck extensions are possible. They provide a fixture from the enclosure (connection head) to the process or thermowell. The standard neck extensions are the nipple-union-nipple or the male threaded neck tube. These extensions allow for directional rotation of the head for field wiring as well as a positive quick disconnection of the assembly from the process or thermowell.

## WIKA worldwide

## North America

## Canada

WIKA Instruments Canada Ltd.  
Edmonton, Alberta  
Tel.: (+1) 780 463 7035  
Fax: (+1) 780 462 0017  
E-mail: info@wika.ca  
www.wika.ca

## Mexico

Instrumentos WIKA México, S.A. de C.V.  
Álvaro Obregón  
Tel.: (+52) 55 5020 5300  
Fax: (+52) 55 5020 5301  
E-mail: ventas@wika.com  
www.wika.com.mx

## USA

WIK Instrument Corporation  
Lawrenceville, Georgia  
Tel.: (+1) 770-513 8200  
Fax: (+1) 770-338 5118  
E-mail: info@wika.com  
www.wika.com

## South America

## Argentina

WIK Argentina S.A.  
Buenos Aires  
Tel.: (+54) 11 4730-1800  
Fax: (+54) 11 4761-0050  
E-mail: info@wika.com.ar  
www.wika.com.ar

## Brazil

WIK DO BRASIL  
Iperó - SP  
Tel.: (+55) 15 3459 9700  
Fax: (+55) 15 3266 1650  
E-mail: marketing@wika.com.br  
www.wika.com.br

## Europe

## Austria

WIK Meßgerätevertrieb  
Ursula Wiegand GmbH & Co. KG  
Wien  
Tel.: (+43) 1-8 69 16 31  
Fax: (+43) 1-8 69 16 34  
E-mail: info@wika.at  
www.wika.at

## Benelux

WIK Benelux  
Echt  
Tel.: (+31) 475 53 55 00  
Fax: (+31) 475 53 54 46  
E-mail: info@wika.nl  
www.wika.nl

## Bulgaria

WIK Bulgaria EOOD  
Sofia  
Tel.: (+359) 2 82138-10  
Fax: (+359) 2 82138-13  
E-mail: t.antonov@wika.bg  
www.wika.bg

## Finland

WIK Finland Oy  
Helsinki  
Tel.: (+358) 9-682 49 20  
Fax: (+358) 9-682 49 270  
E-mail: info@wika.fi  
www.wika.fi

## France

WIK Instruments s.a.r.l.  
Éragry-sur-Oise  
Tel.: (+33) 1/34 30 84 84  
Fax: (+33) 1/34 30 84 94  
E-mail: info@wika.fr  
www.wika.fr

## Germany - Head Office

WIK Alexander Wiegand  
GmbH & Co. KG  
Klingenberg  
Tel.: (+49) 9372 132-0  
Fax: (+49) 9372 132-406  
E-mail: info@wika.de  
www.wika.de

## Italy

WIK Italiana SRL  
Arese (Milano)  
Tel.: (+39) 02-93 86 11  
Fax: (+39) 02-93 86 174  
E-mail: info@wika.it  
www.wika.it

## Poland

Kujawska Fabryka Manometrow  
Wloclawek  
Tel.: (+48) 54230 11 00  
Fax: (+48) 54230 11 01  
E-mail: info@manometry.com.pl  
www.manometry.com.pl

## Romania

WIK Instruments Romania S.R.L.  
Bucuresti  
Tel.: (+40) 21-456 31 38  
Fax: (+40) 21-456 31 37  
E-mail: m.anghel@wika.ro  
www.wika.ro

## Russia

ZAO "WIK MERA"  
Moskau  
Tel.: (+7) 495-648 01 80  
Fax: (+7) 495-648 01 81  
E-mail: info@wika.ru  
www.wika.ru

## Serbia

WIK Merna Tehnika d.o.o.  
Beograd  
Tel.: (+381) 11 2763 722  
Fax: (+381) 11-753 674  
E-mail: info@wika.co.yu  
www.wika.co.yu

## Spain

Instrumentos WIK, S.A.  
Sabadell (Barcelona)  
Tel.: (+34) 902 902 577  
Fax: (+34) 933 938 666  
E-mail: info@wika.es  
www.wika.es

## Switzerland

MANOMETER AG  
Hitzkirch  
Tel.: (+41) 41 919 72 72  
Fax: (+41) 41 919 72 73  
E-mail: info@manometer.ch  
www.manometer.ch

## Ukraine

WIK Pribor GmbH  
Donetsk  
Tel.: (+38) 062 345-34-16  
Fax: (+38) 062 345-34-17  
E-mail: info@wika.donetsk.ua  
www.wika.donetsk.ua

## United Kingdom

WIK Instruments Limited  
Merstham, Redhill  
Tel.: (+44) (0) 1737 644 008  
Fax: (+44) (0) 1737 644 403  
E-mail: info@wika.co.uk  
www.wika.co.uk

## Africa/Middle East

## Egypt

WIK Alexander Wiegand  
GmbH & Co. KG  
Nasr City, Cairo  
Tel.: (+20) 2-227 33 140  
Fax: (+20) 2-227 33 140  
E-mail: Ahmed.Azab@wika.de

## Iran

WIK Instrumentation Pars  
Kish Ltd.  
Tehran  
Tel.: (+98) 21- 8852 6730 3  
Fax: (+98) 21- 8875 7413  
E-mail: info@wika.ir  
www.wika.ir

## South Africa

WIK Instruments (Pty.) Ltd.  
Gardenview, Johannesburg  
Tel.: (+27) 11-621 00 00  
Fax: (+27) 11-621 00 59  
E-mail: sales@wika.co.za  
www.wika.co.za

## United Arab Emirates

WIK Middle East FZE  
Jebel Ali, Dubai  
Tel.: (+971) 4-883 90 90  
Fax: (+971) 4-883 91 98  
E-mail: wikame@emirates.net.ae

## Asia

## China

WIK International Trading  
(Shanghai) Co., Ltd.  
Shanghai  
Tel.: (+86) 21 53 85 25 72  
Fax: (+86) 21 53 85 25 75  
E-mail: wikash@online.sh.cn

## India

WIK Instruments India Pvt. Ltd.  
Waghholi, Pune  
Tel.: (+91) 20-66293200  
Fax: (+91) 20-66293325  
E-mail: sales@wika.co.in  
www.wika.co.in

## Japan

WIK Japan K.K.  
Minato-ku, Tokyo  
Tel.: (+81) 3-5439-6673  
Fax: (+81) 3-5439-6674  
E-mail: t-shimane@wika.co.jp

## Kazakhstan

TOO WIK Kasachstan  
Almaty  
Tel.: (+7) 3272 33 08 48  
Fax: (+7) 3272 78 99 05  
E-mail: info@wika.kz  
www.wika.kz

## Korea

WIK Korea Ltd.  
Seoul  
Tel.: (+82) 2-869 05 05  
Fax: (+82) 2-869 05 25  
E-mail: info@wika.co.kr  
www.wika.co.kr

## Malaysia

WIK Instrumentation (M) Sdn Bhd  
Puchong, Selangor  
Tel.: (+03) 80631080  
Fax: (+03) 80631070  
E-mail: info@wika.com.my  
www.wika.com.my

## Singapore

WIK Instrumentation PTE. LTD.  
Singapore  
Tel.: (+65) 6844 55 06  
Fax: (+65) 6844 55 07  
E-mail: info@wika.com.sg  
www.wika.com.sg

## Taiwan

WIK Instrumentation Taiwan Ltd.  
Pinjen, Taoyuan  
Tel.: (+886) 3 420 6052  
Fax: (+886) 3 490 0080  
E-mail: info@wika.com.tw  
www.wika.com.tw

## Australia

WIK Australia Pty. Ltd.  
Rydalmere NSW  
Tel.: (+61) 2 8845 5222  
Fax: (+61) 2 9684 4767  
E-mail: sales@wika.com.au  
www.wika.com.au

## TR10 Industrial RTD Assembly



WIKAI

Part of your business

WIKAI

Part of your business

